

六角穴付きボルト UNF


ANSI B 18.3
ISO 4762
DIN 912



特徴

六角穴付きボルトのユニファイ規格(細目)用です。
キャップ UNFとも呼ばれます。

寸法図

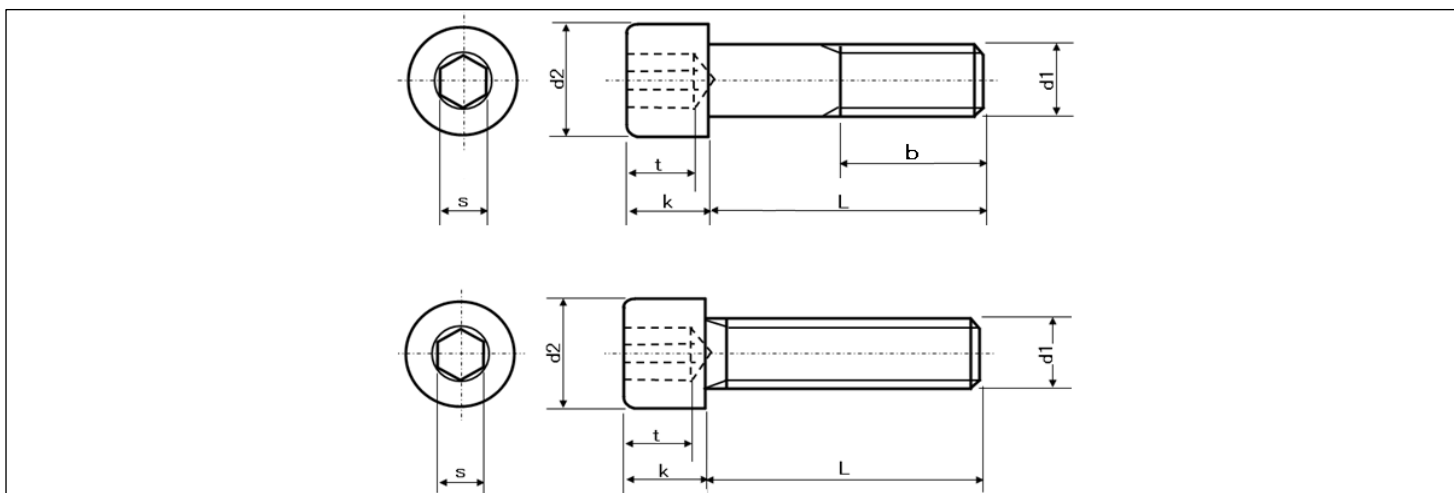

寸法表

	ねじ山数	d2 MAX(mm)	d2 MIN(mm)	k MAX(mm)	k MIN(mm)	t MIN(mm)	六角穴サイズ*
No.0	80	2.438	2.311	1.524	1.447	0.635	0.05
No.1	72	2.997	2.844	1.854	1.778	0.787	1/16
No.2	64	3.556	3.403	2.184	2.108	0.965	5/64
No.3	56	4.089	3.911	2.514	2.413	1.117	5/64
No.4	48	4.648	4.47	2.844	2.743	1.295	3/32
No.5	44	5.207	5.029	3.175	3.073	1.447	3/32
No.6	40	5.74	5.537	3.506	3.403	1.625	7/64
No.8	36	6.858	6.654	4.165	4.038	1.955	9/64
No.10	32	7.924	7.696	4.826	4.699	2.286	5/32
1/4	28	9.525	9.271	6.35	6.197	3.048	3/16
5/16	24	11.912	11.607	7.924	7.772	3.835	1/4
3/8	24	14.274	13.97	9.525	9.347	4.622	5/16
7/16	20	16.662	16.306	11.125	10.922	5.41	3/8
1/2	20	19.05	18.669	12.7	12.496	6.223	3/8
5/8	18	23.826	23.394	15.875	15.647	7.798	1/2
3/4	16	28.575	28.117	19.05	18.796	9.398	5/8
7/8	14	33.325	32.843	22.225	21.946	10.973	3/4
1`	12	38.1	37.567	25.4	25.096	12.573	3/4
1-1/4	12	47.625	47.041	31.75	31.395	15.748	7/8
1-1/2	12	57.15	56.49	38.1	37.719	18.923	1